




JDN BOP HANDLING SYSTEMS



JDN-BOP HANDLING SYSTEMS

CAPACITIES: 20 T UP TO 200 T

BOP handling systems from J.D. Neuhaus are recognised for their reliable, robust and efficient operation on land and on jack-up and semi-submersible drilling platforms. The monorail air hoists (EH) in our BOP handling systems feature a compact design with low installation height. They can be used as double hoists in standard BOP handling systems or, when linked together with a coupling rod, can be operated as a 4-point BOP handling system. For extremely low headrooms we recommend our ultra-low hoists from the UH series. Alternatively, all BOP handling systems are available with hydraulic drives.

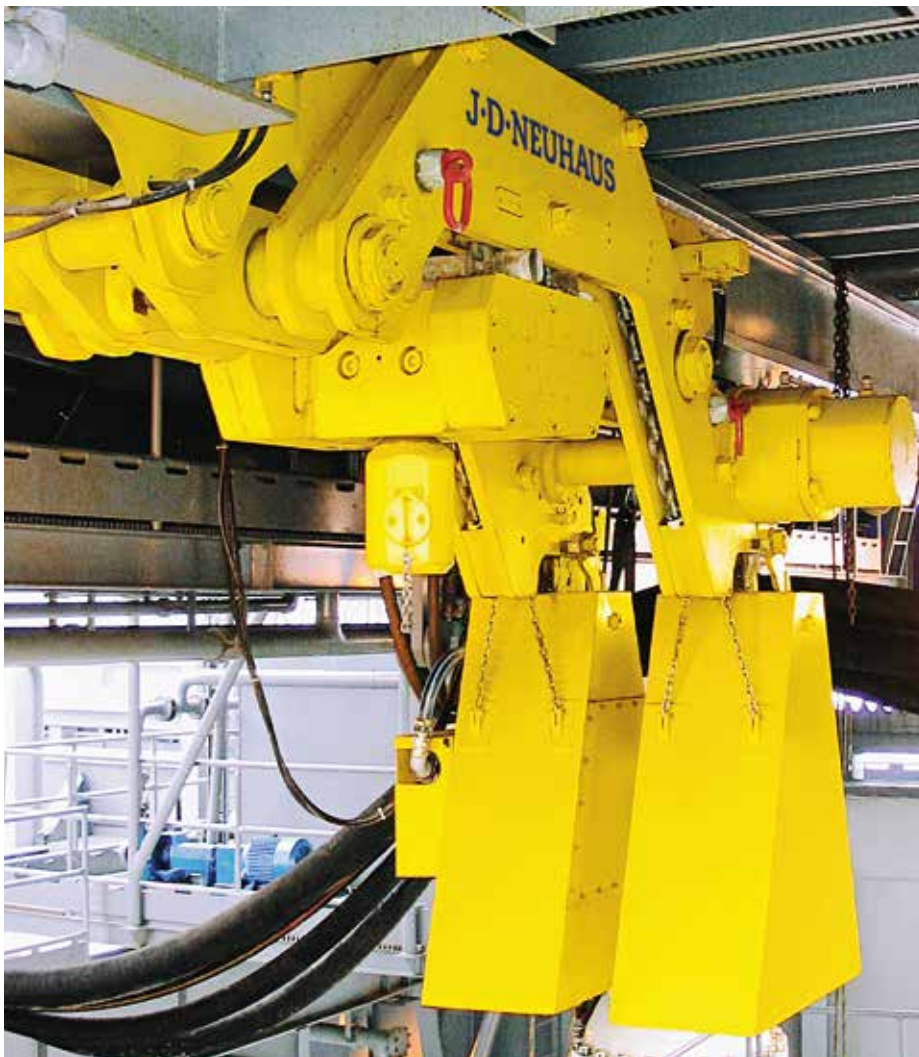

OPTIONS

- Offshore version for special corrosion protection under tough weather conditions (salty, moist air) on sea and land
- Offshore paint finish
- Rack and pinion drive
- Delta-P overload protection
- Ultra-low hoists
- Pneumatic, hydraulic or electric remote control
- Load display systems
- Radio remote control
- Articulated trolleys for limited side pulling
- Individual acceptance by the authorised companies of your choice
- Special versions according to your requirements
- Cryogenic versions down to -45°C

Ultra-Flachhubwerk
BOP Handling System
BHU 200

TECHNICAL DATA

Type		BH 20	BH 32	BH 40	BH 50	BH 75	BH 100	BH 150	BH 200
Consisting of 2 units		EH10	EH16	EH20	EH25	EH37	EH50	EH75	EH100
Capacity	mt	20	32	40	50	75	100	150	200
Weight with standard lift	lbs kg	1984 900	2535 1150	2734 1240	4409 2000	6614 3000	7275 3300	17637 8000	25133 11400
Standard lift	ft m	10 3	10 3	10 3	10 3	10 3	10 3	10 3	10 3
Length of control at standard lift	ft m	6.5 2	6.5 2	6.5 2	6.5 2	6.5 2	6.5 2	6.5 2	6.5 2